


DYNAPOWERUSA Open Frame Type Switching Power Supply

Professional Power supply Industrial PC, Server, Storage
Best Solution Guide

120Watts Single Output

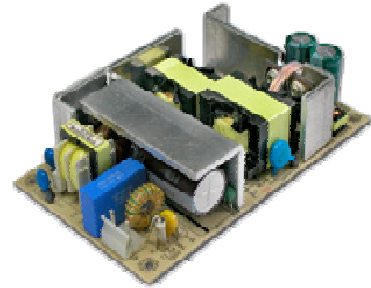

FEATURES

- Build-in active PFC function
- 100% Burn-in and Hi-pot tested

ELECTRICAL SPECIFICATIONS

- Input range : 90 - 264VAC
- Frequency : 47 - 63Hz
- Power Factor : > 0.95 @115VAC; > 0.90 @230VAC @full load
- Inrush current : < 30A peak @115VAC; < 60A peak @230VAC cold start @25°C
- Input current (rms) : 2.5A @115VAC; 5A @230VAC max.
- Efficiency : > 85% typical @full load, 115VAC
- Maximum output power (Po) : 120 Watts convection cooling
- Hold-up time : > 16ms typical @full load, 115VAC
- Short circuit protection : Auto-recovery
- Over load protection : 105% to 150% maximum rating, Auto-recovery
- Over voltage protection : Shutdown

ENVIRONMENTAL

- Operating temperature : 0 to +60°C (Derate linearly 2.5% per °C from 41 to 60°C)
- Storage temperature: -10°C to +70°C
- Humidity: Non-condensing 10% to 95%
- MTBF : > 100,000 hours @full load and 25°C ambient temperature

RoHS compliant

Dimension : L127 × W76.2 × H30 mm (5"× 3"× 1.18")
Weight : 0.31 kgs. (0.68 lbs.)

Safety standards

UL 60950-1
CSA C22.2 No.60950-1
TUV EN60950-1
CB IEC 60950-1

EMI standards

FCC Class B
CISPR 22 Class B
EN 55022 Class B
EN 55024
EN 61000-3-2 Class D
CE

DC OUTPUT & FEATURES

Model No.	Output Voltage	Minimum Load	Maximum Load with Convection Cooling	Po	O/P Regulation	Ripple & Noise(Vp-p)
EJ-120B-1Y12P-PW	+12V	0A	10A	120W	±3%	120mV
EJ-120B-1Y15P-PW	+15V	0A	8A	120W	±2%	150mV
EJ-120B-1Y18P-PW	+18V	0A	6.67A	120W	±2%	180mV
EJ-120B-1Y19P-PW	+19V	0A	6.32A	120W	±2%	190mV
EJ-120B-1Y24P-PW	+24V	0A	5A	120W	±2%	240mV
EJ-120B-1Y30P-PW	+30V	0A	4A	120W	±2%	300mV
EJ-120B-1Y32P-PW	+32V	0A	3.75A	120W	±2%	320mV
EJ-120B-1Y36P-PW	+36V	0A	3.34A	120W	±2%	360mV
EJ-120B-1Y48P-PW	+48V	0A	2.5A	120W	±2%	480mV


- Note:**
1. At 25°C including initial tolerance, line voltage, load currents and output voltages adjusted to factory settings.
 2. Ripple and noise are measured at oscilloscope 20MHz bandwidth by a 10uF electrolytic capacitor and a 0.1uF ceramic capacitor in parallel at output connector.

DYNAPOWERUSA Open Frame Type Switching Power Supply

*Professional Power supply Industrial PC, Server, Storage
Best Solution Guide*

120Watts Single Output

MECHANICAL SPECIFICATION

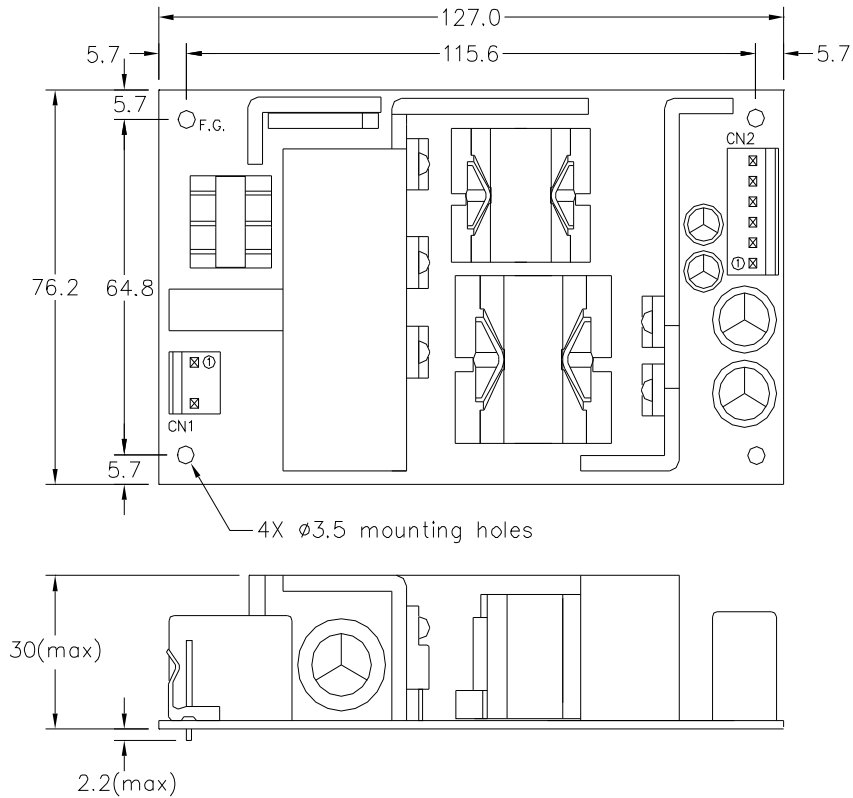

MATCHING CONNECTORS

CN1: Input Connector

molex 09-65-2029 pitch: 7.92mm or equivalent, mates with female housing molex 09-76-1020 or equivalent

Pin #	Signal
1	AC Neutral
2	AC Line

CN2: Output Connector

molex 09-65-2068 pitch: 3.96mm or equivalent, mates with female housing molex 09-52-4064 or equivalent

Pin #	Signal
1	+Vo
2	+Vo
3	+Vo
4	GND
5	GND
6	GND