




ever Joy ever Triumph

Rack Mount KVM Switch 3to3 Standard type, OSD, cascadable

■ EJ-KVM208X3

8 Port 3to3, 7 segment display

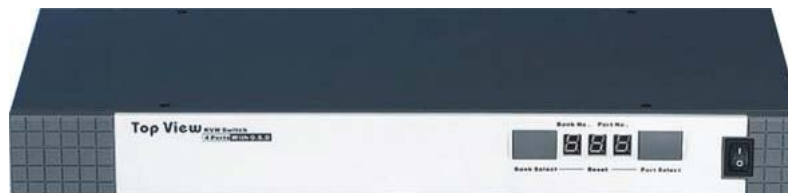


(FRONT)



(REAR)

■ EJ-KVM216X3

16 Port 3to3, 7 segment display

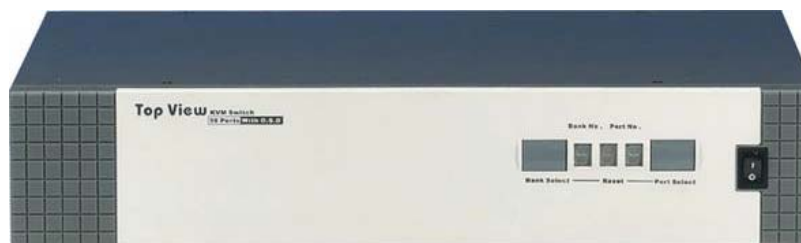

(FRONT)



(REAR)



- **EJ-KVM208X3**
- **EJ-KVM216X3**

Features

- 8/16 port KVM switch is 19" rack mount size design.
- Support Microsoft Intellimouse, Microsoft Intellimouse Explorer, Logitech Net Mouse or the other fully compatible MS mouse.
- Provide Console PS/2 to PC serial mouse conversion
- Support DOS, Win3.X, Win95/98/98SE/2000/ME/XP, WinNT, Netware, SCO Unix, HP Unix, Linux
- Hot Plug - Add PCs or Remove Connected PCs for Maintenance without Powering Down the KVM switch or PCs.
- Very High Video Quality - Up To 1920X1440, Bandwidth: 200MHz
- No Software Required - easy PC selection via On Screen Display Manual, Push Buttons, Hot Keys
- Support eight characters password protection and search PC server name
- Auto Scan Mode for monitoring PCs and flexible Scan time from 5~99 seconds
- Keyboard status restored when switching PCs
- LED Display for easy status monitoring
- Buzzer sound for switching port confirmation.
- Using Standard Keyboard, VGA, Mouse cable.
- Built-in one extra daisy chain port and no waste any PC port
- No DIP switch setting needed and auto detect daisy chain bank



- **EJ-KVM208X3**
- **EJ-KVM216X3**

Technical Specifications

Model No.		8 port KVM Switch	16 port KVM Switch
PC Port		8	16
Console Port		1	1
PC Port Connector (All Female Type)	PS/2 Keyboard mini Din 6 pin PS/2 Mouse Mini Din 6 pin VGA HDDB 15pin		
Console Port Connector (All Female Type)	PS/2 Keyboard mini Din 6 pin PS/2 Mouse Mini Din 6 pin VGA HDDB 15pin		
Daisy Chain Port Connector (All Female Type)	PS/2 Keyboard mini Din 6 pin PS/2 Mouse Mini Din 6 pin VGA HDDB 15pin		
PC selection	On Screen Display Menu, Hot Key, Push Button		
7 segment LED	One Bank LED, Two PC Port LEDs		
On Screen Display Control	Yes		
Scan Intervals	5~99 Sec.		
Keyboard Emulation	PS2		
Mouse Emulation	PS2		
Mouse Conversion (Only Console port to PC port)	Console PS/2 to each PC port serial mouse		
VGA Resolution	2048X1536		
Bandwidth	400MHz		
Daisy Chain MAX Level	8 levels		
MAX PC Connection		120	128
Housing	Metal		
Power Adapter	DC 12V 1A or DC 9V 1A		
Operation Temperature	0~40°C		
Storage Temperature	-20 ~ 60°C		
Humidity	0~80%, Non-Condensing		
Size		19" Rack Mount / 1RU	19" Rack Mount/ 2RU
Weight (kg)		2.2kg	3.5kg
Dimension (cm)		41(L) X 16.5(W) X 4.4(H)	41(L) X 22.5(W) X 8.9(H)