




15A NEMA
5-15P Input

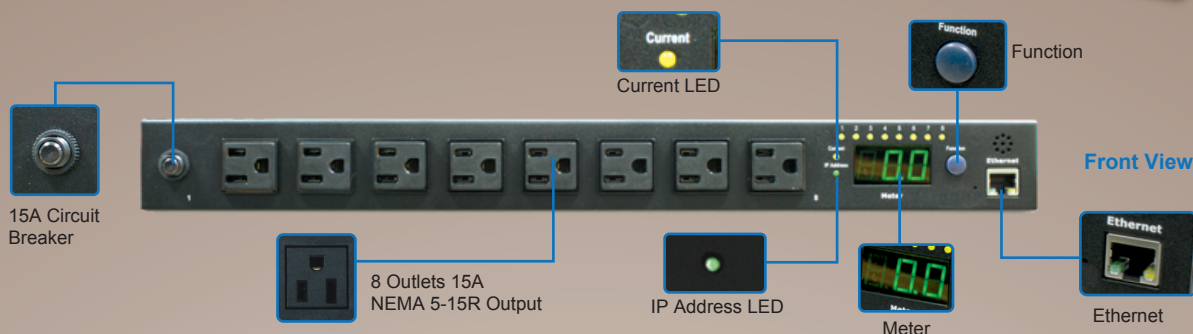

Features

- Current Meter: Digital True RMS Current Meter
- Power Monitor: Remote Total Power Monitoring by Meter, Web, SNMP, Free Bundle Software
- Protocols: Http, Https, SNMP, DHCP, UDP
- Outlet Control: Individual Outlet Control
- Power Delay: Power On/Off Sequence can be Defined
- Alarm Thresholds: User-Defined Alarm Thresholds for Warning and Overload
- Event Alert: Email, Trap, Audible Alarm



Specification

General

Output: (8) NEMA 5-15/20R
Input: (1) IEC320 C20 Inlet; Enclosed IEC320
C19 to NEMA 5-15P Power Cord 3 Meters long
Protection: (1) 15 AMP Circuit Breaker

Communication

SSL Indication: (1) Yellow LED
DHCP Indication: (1) Green LED
Output Status: (8) Green LED
Network: (1) RJ45 for Ethernet
Current Meter: 3 Digits Seven Segments for True RMS Meter
Range: 0A ~ 20 A
Resolution: 0.1A
Precision: +/-2%/+/-0.1AMP

Operation

Nominal Voltage: 115V
Voltage: 100V~127V full range
Frequency: 50/60HZ full range
Max. Output Current: 15 Amp (UL derated 12 Amp)
Temperature: 0 ~ 40 Celsius degree
Humidity: 0% ~ 90%
Size: 90 x 432 x 44 mm
Weight: 2 kg

Regulatory Approvals

UL 60950-1, UL Listed, CSA, cUL Listed, CB by UL CE, EN 55022 Class A, EN 55024,
EN 61000-3-2, EN 61000-3-3 FCC Part 15 Class A, ICES-003

